


- NOTES : 1.) TUBE - BLACK OIL RESISTANT SYNTHETIC RUBBER.  
 2.) REINFORCEMENT - ONE BRAID OF HIGH TENSILE STEEL WIRE.  
 3.) COVER - BLACK OIL ABRASION RESISTANT SYNTHETIC RUBBER.  
 4.) RATED WORKING P.S.I. - 2250  
 5.) MINIMUM BURSTING P.S.I. - 9000  
 6.) CAP BOTH ENDS.

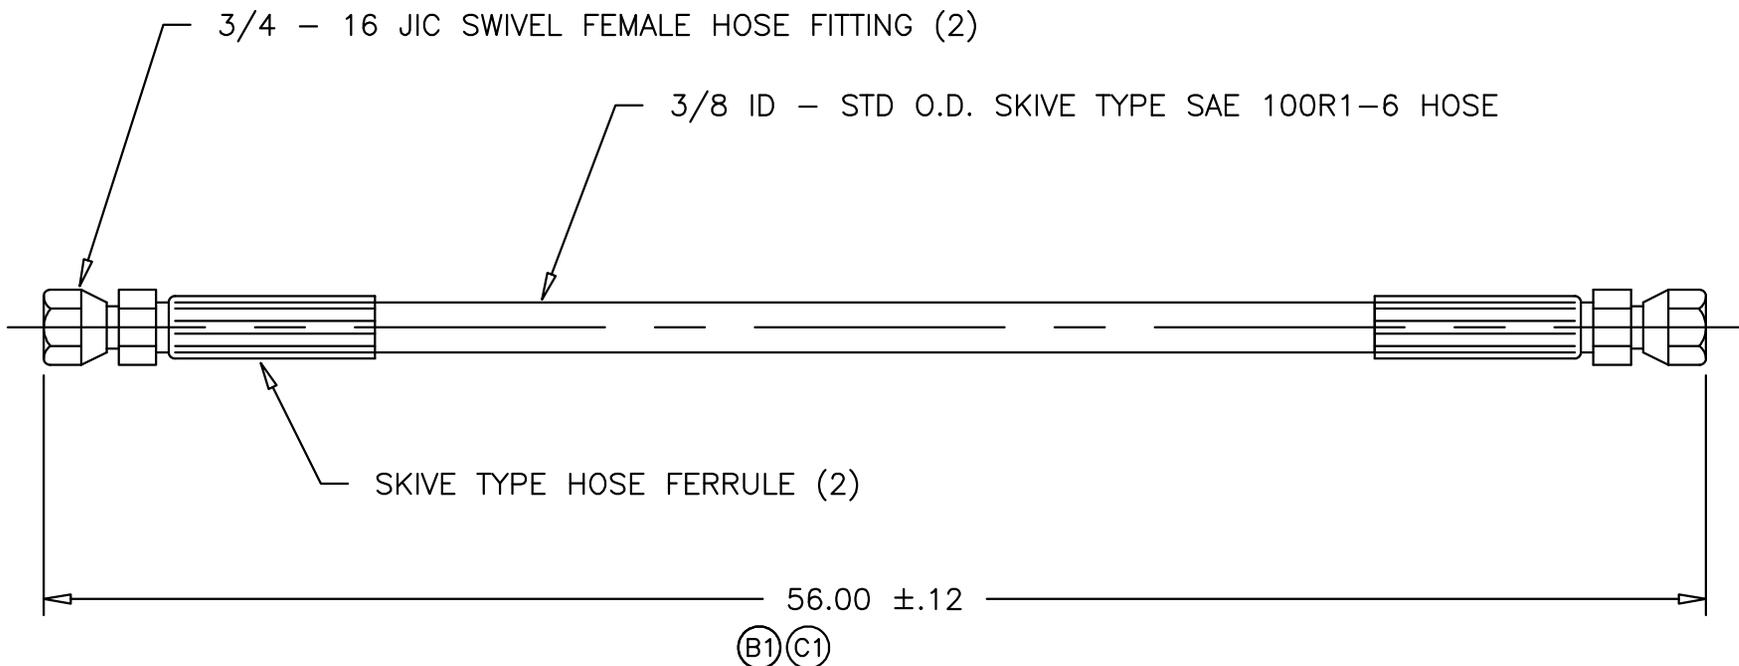

					MATERIAL	PPP	[ STD MIL TOL. UNLESS SPEC. ]							
					TOLERANCE UNLESS SPECIFIED		<h1 style="text-align: center;">WIL-RICH</h1> <p style="text-align: center;">a division of TIC UNITED CORP.</p>							
017719	PS	1/77	C1	4-1/2 FT	DECIMAL: .X ±.06 [1,5] .XX ±.03 [0,8] .XXX ±.015 [0,38]									
117501	TB	11/75	B1	54.00	HOLE DIA: -.005 +.015 [-0,13 +0,38]	HYD HOSE 3/8x56 FF R1 JIC/JIC								
087511	TB	8/75	A	RELEASE	ANGLES: ±1.5° METRIC: [ ] DO NOT SCALE THIS DRAWING									
EO	BY	DATE	LTR	REVISION	PREP	TSB 10-6-75	CHK	AB	APVD	DR	SCALE	NONE	DWG NO.	13265

TSC — NOTICE: WIL-RICH a division of TIC UNITED CORP. claims proprietary rights to the information disclosed on this drawing. It is issued in confidence for engineering information only, and may not be reproduced or used to manufacture anything shown hereon without direct written permission from WIL-RICH a division of TIC UNITED CORP. to the user.