


- NOTES : 1.) TUBE - BLACK OIL RESISTANT SYNTHETIC RUBBER.  
 2.) REINFORCEMENT - ONE BRAID OF HIGH TENSILE STEEL WIRE.  
 3.) COVER - BLACK OIL ABRASION RESISTANT SYNTHETIC RUBBER.  
 4.) RATED WORKING P.S.I. - 2250  
 5.) MINIMUM BURSTING P.S.I. - 9000  
 6.) CAP BOTH ENDS.

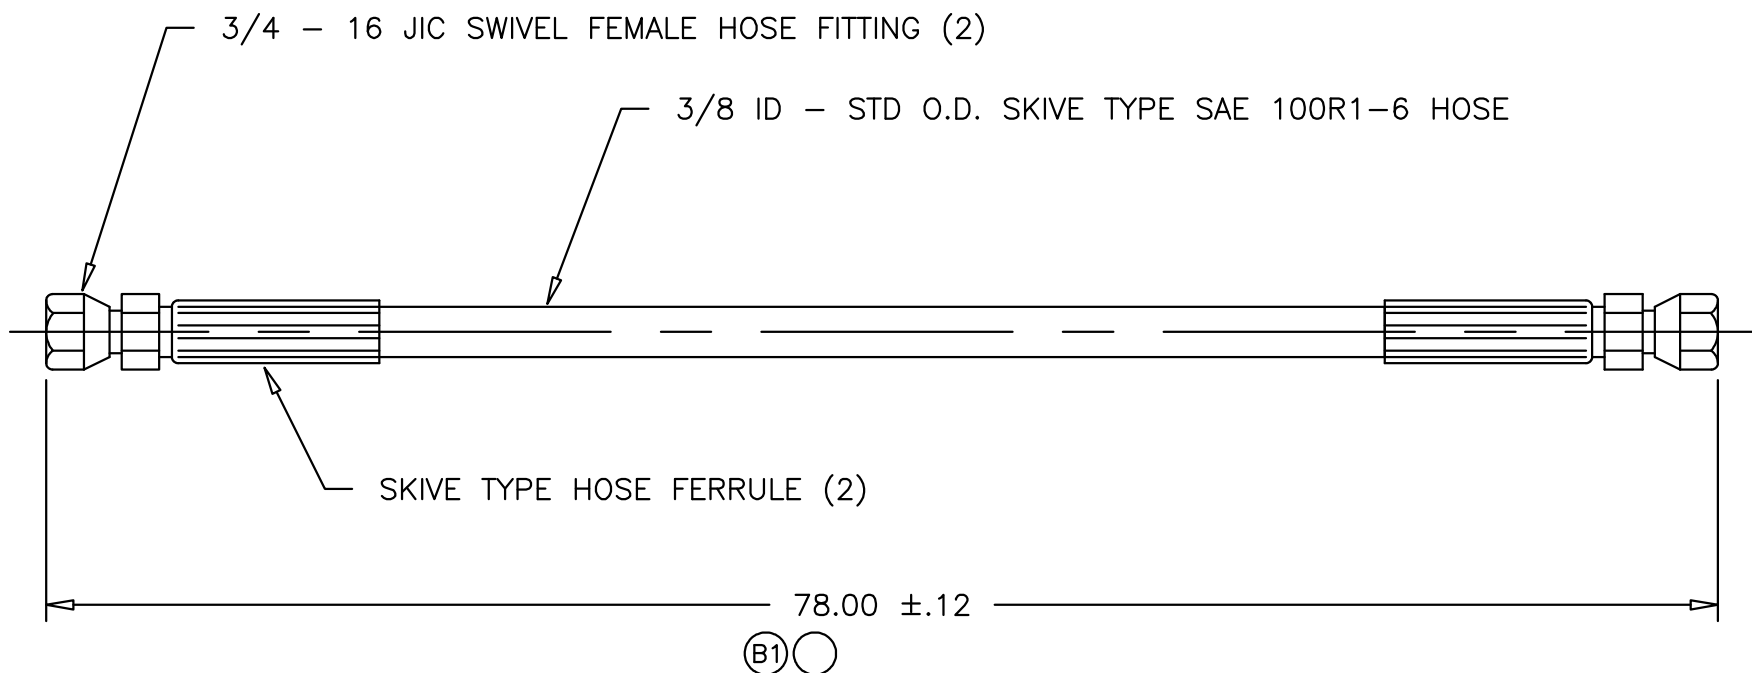

					MATERIAL	PPP	[ STD MIL TOL. UNLESS SPEC. ]							
					TOLERANCE UNLESS SPECIFIED	<h1 style="text-align: center;">WIL-RICH</h1> <p style="text-align: center;">a division of TIC UNITED CORP.</p>								
					DECIMAL: .X ±.06 [1,5] .XX ±.03 [0,8] .XXX ±.015 [0,38] HOLE DIA: -.005 +.015 [-0,13 +0,38] ANGLES: ±1.5° METRIC: [ ] DO NOT SCALE THIS DRAWING									
017719	PS	1/77	B1	6-1/2 FT	HYD HOSE 3/8x78 FF R1 JIC/JIC									
087511	TB	8/75	A	RELEASE	PREP	TSB 10-6-75	CHK	AB	APVD	DR	SCALE	NONE	DWG NO.	13268
EO	BY	DATE	LTR	REVISION										

TSC — NOTICE: WIL-RICH a division of TIC UNITED CORP. claims proprietary rights to the information disclosed on this drawing. It is issued in confidence for engineering information only, and may not be reproduced or used to manufacture anything shown hereon without direct written permission from WIL-RICH a division of TIC UNITED CORP. to the user.