


- NOTES : 1.) TUBE - BLACK OIL RESISTANT SYNTHETIC RUBBER.
 2.) REINFORCEMENT - ONE BRAID OF HIGH TENSILE STEEL WIRE.
 3.) COVER - BLACK OIL ABRASION RESISTANT SYNTHETIC RUBBER.
 4.) RATED WORKING P.S.I. - 2250
 5.) MINIMUM BURSTING P.S.I. - 9000
 6.) CAP BOTH ENDS.

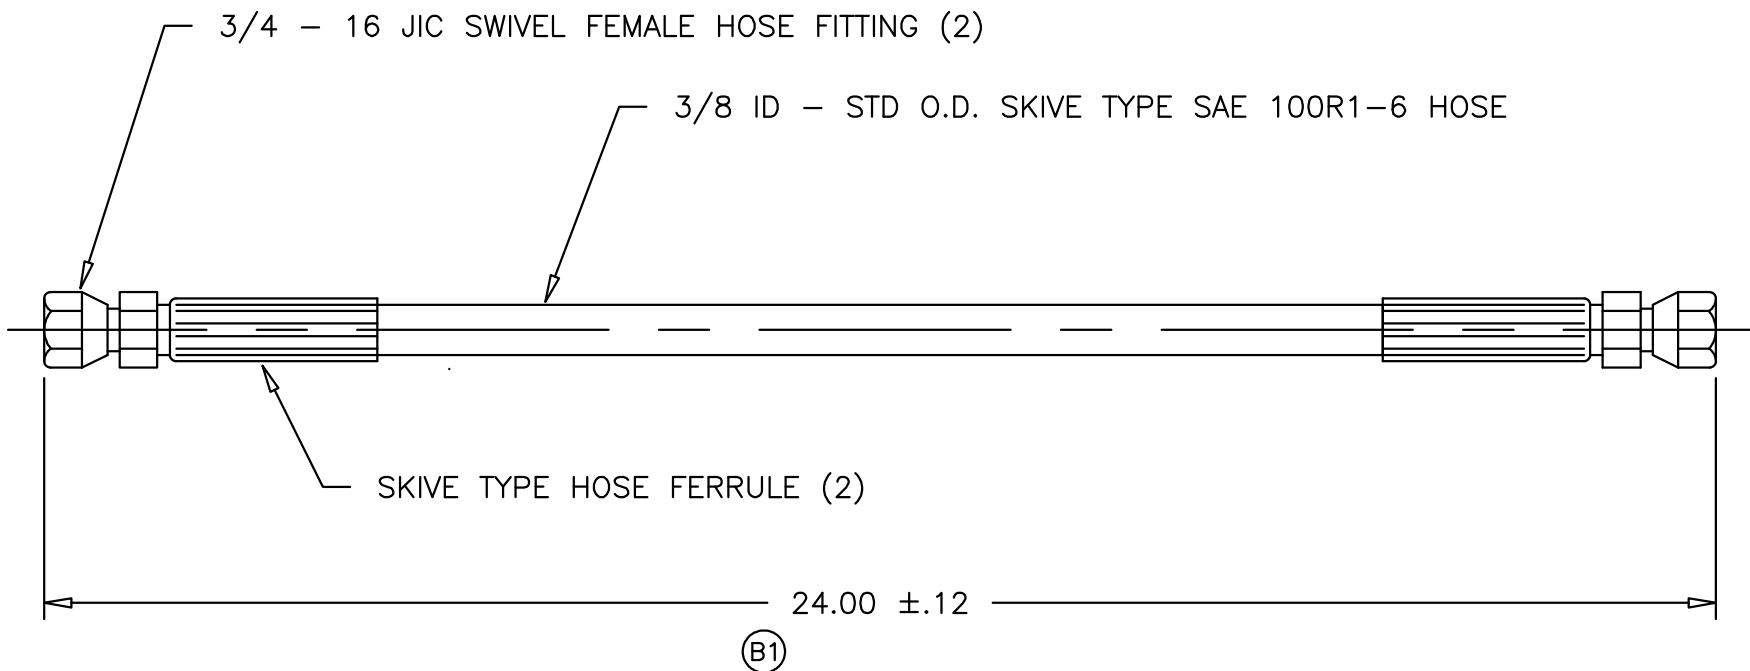

017719	PS	1/77	B1	2 FT
117522	TB	11/75	A	RELEASE
EO	BY	DATE	LTR	REVISION

MATERIAL	PPP	[STD MIL TOL. UNLESS SPEC.]
TOLERANCE UNLESS SPECIFIED	<p>DECIMAL: .X ±.06 [1,5] .XX ±.03 [0,8] .XXX ±.015 [0,38]</p> <p>HOLE DIA: -.005 +.015 [-0,13 +0,38]</p> <p>ANGLES: ±1.5° METRIC: []</p> <p>DO NOT SCALE THIS DRAWING</p>	
<p>WIL-RICH a division of TIC UNITED CORP.</p>		
<p>HYD HOSE 3/8x24 FF R1 JIC/JIC</p>		
PREP	TSB 10-6-75	CHK AB APVD DR SCALE NONE DWG NO. 13423

TSC — NOTICE: WIL-RICH a division of TIC UNITED CORP. claims proprietary rights to the information disclosed on this drawing. It is issued in confidence for engineering information only, and may not be reproduced or used to manufacture anything shown hereon without direct written permission from WIL-RICH a division of TIC UNITED CORP. to the user.