


- NOTES : 1.) TUBE - BLACK OIL RESISTANT SYNTHETIC RUBBER.
 2.) REINFORCEMENT - ONE BRAID OF HIGH TENSILE STEEL WIRE.
 3.) COVER - BLACK OIL ABRASION RESISTANT SYNTHETIC RUBBER.
 4.) RATED WORKING P.S.I. - 2250
 5.) MINIMUM BURSTING P.S.I. - 9000
 6.) CAP BOTH ENDS.

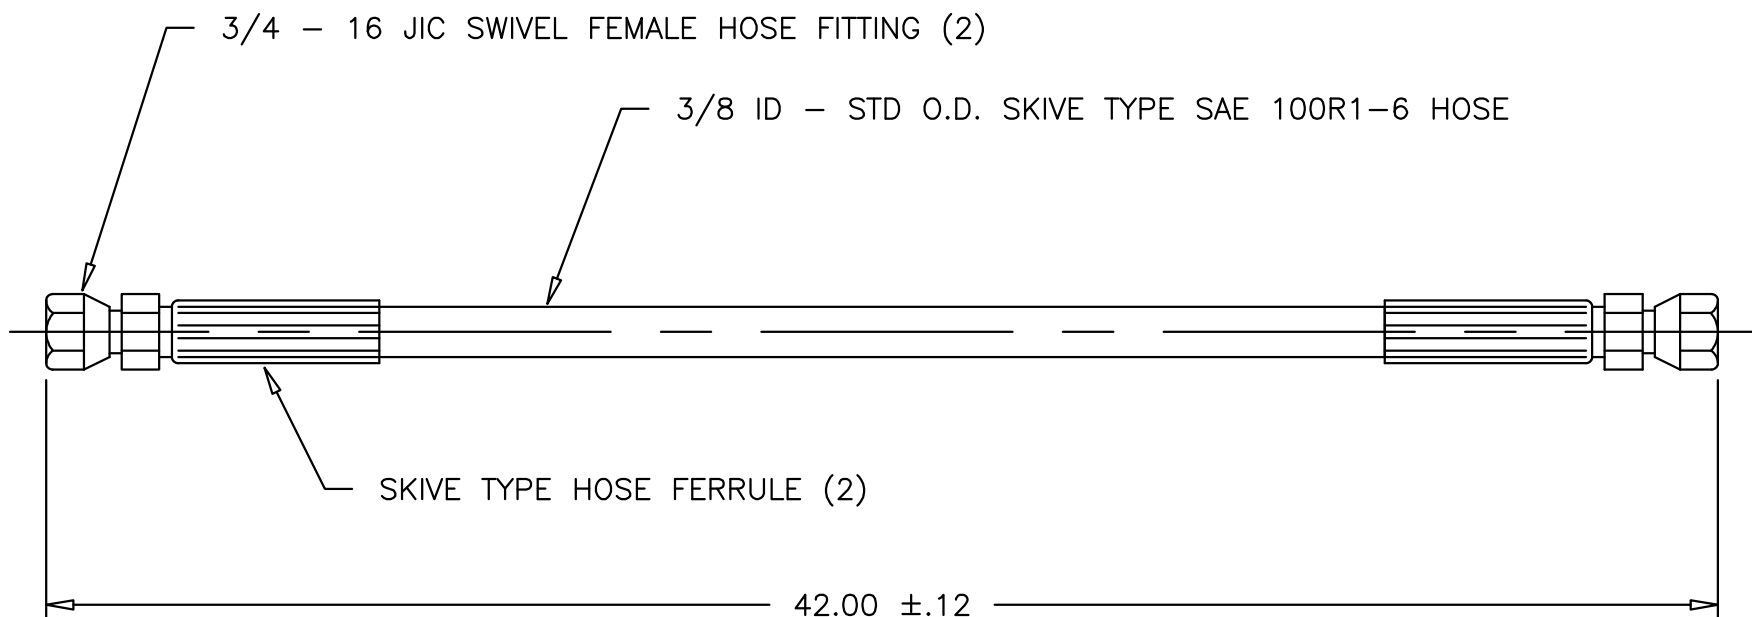

047714	PS	4/77	A	RELEASE
EO	BY	DATE	LTR	REVISION

MATERIAL PPP		[STD MIL TOL. UNLESS SPEC.]	
TOLERANCE UNLESS SPECIFIED DECIMAL: .X ±.06 [1,5] .XX ±.03 [0,8] .XXX ±.015 [0,38] HOLE DIA: -.005 +.015 [-0,13 +0,38] ANGLES: ±1.5° METRIC: [] DO NOT SCALE THIS DRAWING		<h1 style="text-align: center;">WIL-RICH</h1> <p style="text-align: center;">a division of TIC UNITED CORP.</p> <p style="text-align: center;">HYD HOSE 3/8x42 FF R1 JIC/JIC</p>	
PREP PAS 4-6-77	CHK AB		
		DWG NO.	14850

TSC — NOTICE: WIL-RICH a division of TIC UNITED CORP. claims proprietary rights to the information disclosed on this drawing. It is issued in confidence for engineering information only, and may not be reproduced or used to manufacture anything shown hereon without direct written permission from WIL-RICH a division of TIC UNITED CORP. to the user.