



2 HOSE ASSEMBLY CONFORMS TO BOBCAT ENGINEERING STANDARDS PER MS123-142 UNLESS OTHERWISE SPECIFIED.

3. PACKAGE TO PREVENT CONTAMINATION AND DAMAGE.





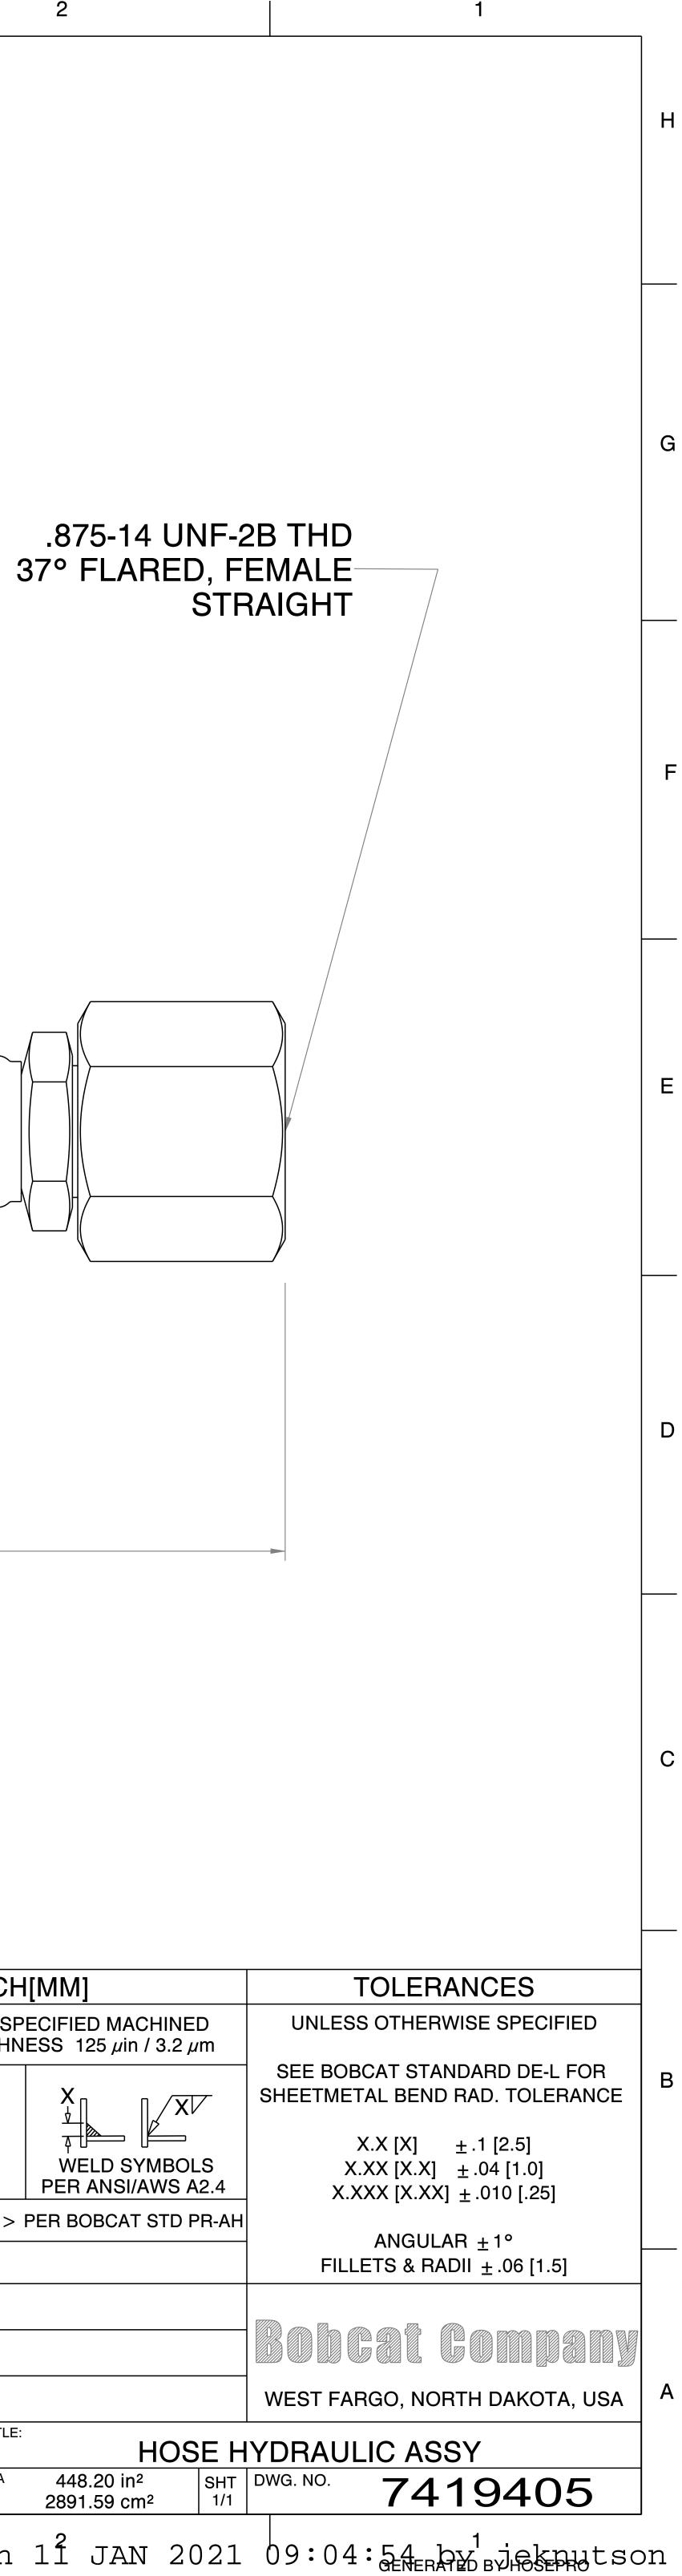

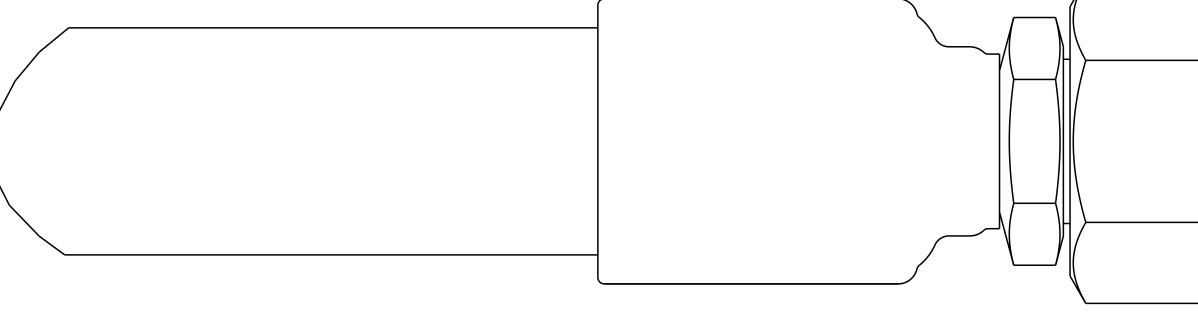

3

WARNING	C INCH[MM]
THE EXPORT OR REEXPORT OF THIS DRAWING OR A PRODUCT PRODUCED BY THIS DRAWING IS SUBJECT TO U.S. EXPORT ADMINISTRATION REGULATIONS AND OTHER APPLICABLE GOVERNMENTAL	UNLESS OTHERWISE SPECIFIED MACHINE SURFACE MAX. ROUGHNESS 125 μ in / 3.2
RESTRICTIONS OR REGULATIONS. COPYRIGHT® ORIGINALLY CREATED AND REVISED IN THE YEARS AS IDENTIFIED IN THE RELEASING ECN. BOBCAT COMPANY RESERVES ALL RIGHTS.	THIRD ANGLE WELD SYMBO PROJECTION PER ANSI/AWS /
PROPRIETARY NOTICE	CHARACTERS OR < TEXT > PER BOBCAT STD
THIS DOCUMENT CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION, IS THE PROPERTY OF BOBCAT COMPANY, AND IS GIVEN TO THE RECEIVER IN CONFIDENCE. THE RECEIVER, BY RECEPTION AND RETENTION OF THE DOCUMENT, ACCEPTS THE DOCUMENTS IN CONFIDENCE AND AGREES THAT, EXCEPT AS AUTHORIZED IN WRITING BY BOBCAT COMPANY, IT WILL (1) NOT USE THE DOCUMENT OR ANY COPY THEREOF OR THE CONFIDENTIAL OR TRADE SECRET INFORMATION THERIN; (2) NOT COPY THE DOCUMENT, (3) NOT DISCLOSE TO OTHERS EITHER THE DOCUMENT OR THE CONFIDENTIAL OR TRADE SECRET INFORMATION THEREIN; AND (4) UPON COMPLETION OF THE NEED TO RETAIN THE DOCUMENT, OR UPON DEMAND, RETURN THE DOCUMENT, ALL COPIES	MATL 2
	TREAT .
	HARD .
	INITIAL ECN: 129089
THEREOF, AND ALL MATERIALS COPIED THEREFROM.	WT 2.92 lb S/A 448.20 in ² 1.324 kg 2891.59 cm ²
cuments are Uncontrolled	d - Printed on 11 JAN 2