


MUST CONFORM TO ALL REQUIREMENTS PER ES-B120		HOSE CLASS, PERFORMANCE AND SUPPLIER DATA	
NOM INSIDE DIA (mm)	12.5 (SAE -8)	CNH HOSE CLASS PER ES-B120	25
LENGTH (mm)	1480±15	PERFORMANCE STANDARD TYPE	2
WORKING PRESSURE (MPa):	25 MPa	SAE/ISO HOSE EQUIVALENT	ISO S 1436-1
MIN BEND RADIUS (mm):	90	HOSE MATERIAL - APPROVED SUPPLIER 1	N/A
MAX TEMP (°C):	-40°C TO +100°C		

LEFT END FITTING SPECIFICATION	
HEX STOCK	METRIC
SIZE	SAE -10 (1-14), O-RING SERVICE P/N,9992069
SHAPE	FEMALE ORFS SWIVEL 90° ELBOW (SHORT)

RIGHT END FITTING SPECIFICATION	
HEX STOCK	METRIC
SIZE	SAE -8 (13/16-16), O-RING SERVICE P/N 9992298
SHAPE	FEMALE ORFS SWIVEL STRAIGHT STYLE A (SHORT)

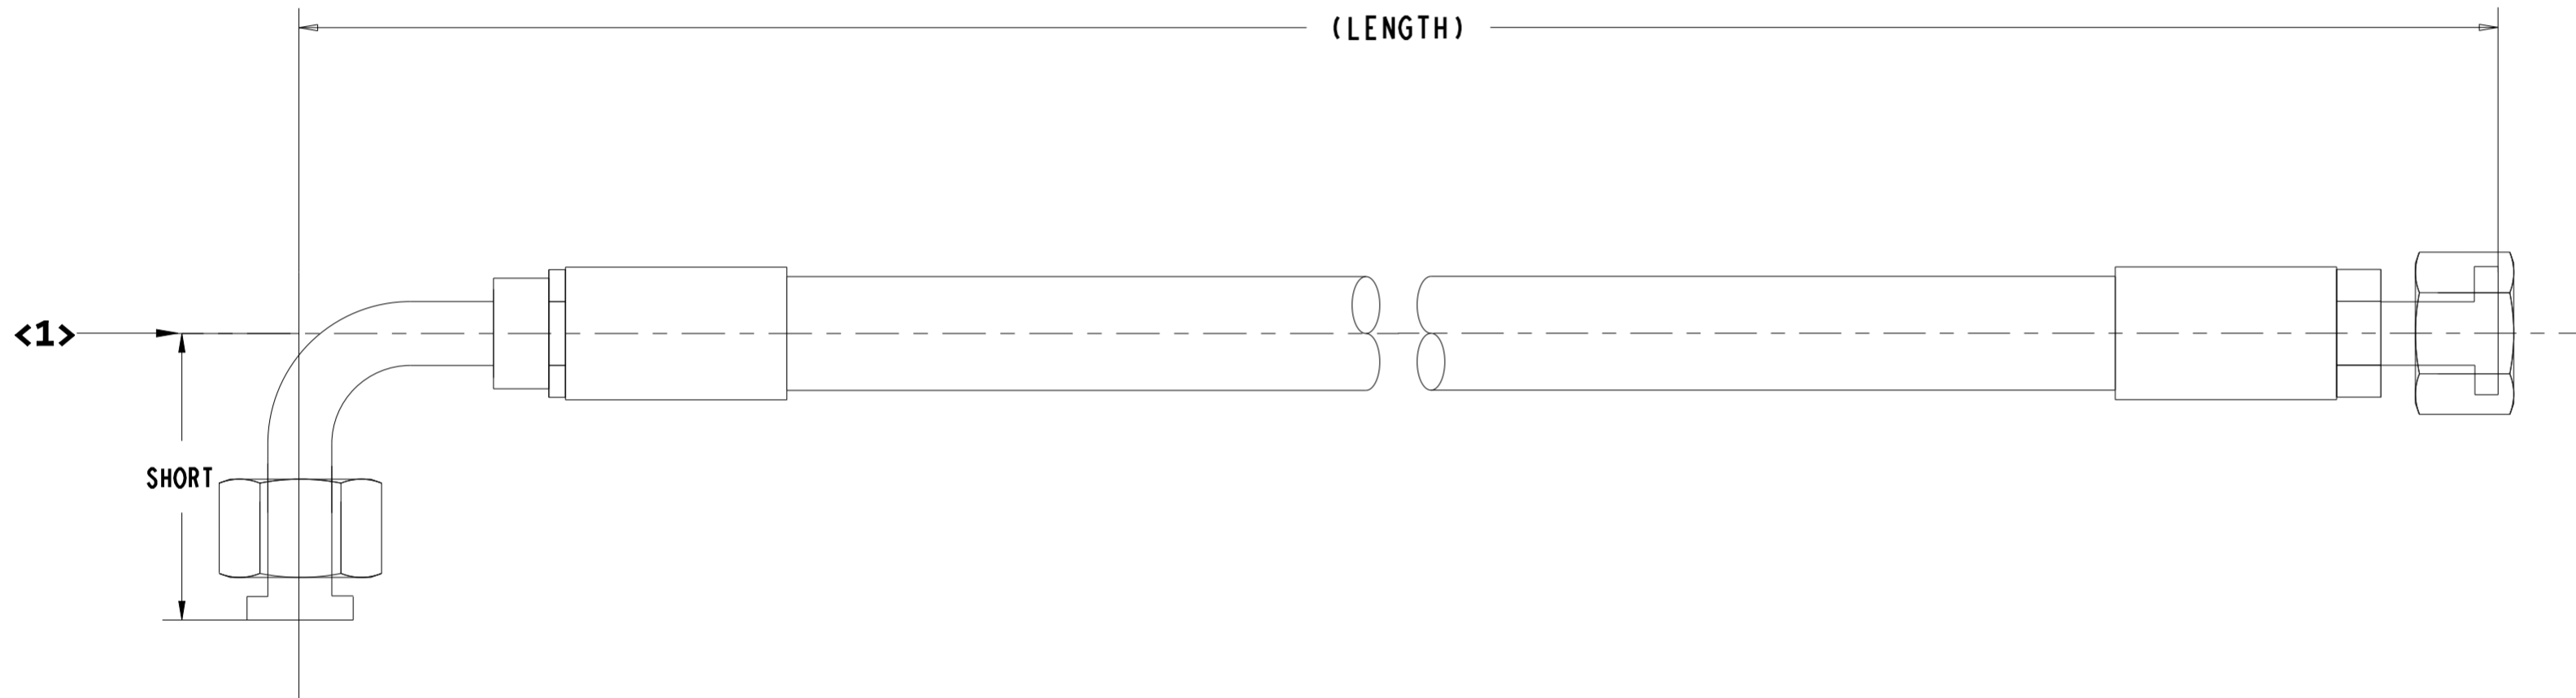

- NOTES:
- <1> ALL VIEWS ON THIS DRAWING ARE FOR REFERENCE ONLY AND MAY NOT ACCURATELY DEPICT THE HOSE ASSEMBLY.
 - 2. ALL EXPOSED SURFACES TO BE ZINC PLATED PER CNH ENS0360

CLEANLINESS MUST COMPLY WITH CNH ENS0103	CODE AD6
--	-------------

DWGB001	DRW INTERPRETATION AND SPECS
STANDARD	DESCRIPTION
APPLICABLE STANDARDS	

ECO	REV	CHANGES	BY	DATE	ECO	REV	CHANGES	BY	DATE
8					7				
					6				
					5				
					4				
					3				
					2				

METRIC THE INFORMATION HEREON IS CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF CNH INDUSTRIAL N.V. AND/OR ITS SUBSIDIARIES. ANY USE, EXCEPT THAT FOR WHICH IT MAY BE LOANED, IS PROHIBITED.

THIRD ANGLE PROJECTION UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS, SURFACE FINISH IN MICROMETERS Ra. DOC NO. - NOM NO SIZE/SYS DWG SCALE DSGN CTRL
 A2/PRO NONE ---

DRAWN BY S BHADORIA 090C123 CHECKED BY MATERIAL BY APPROVED BY APPROXIMATE MASS 0 kg

LOCAL MATERIAL NOT APPLICABLE REFERENCE PART NONE

CNH MATERIAL NOT APPLICABLE DESCRIPTION ---

MODEL PROPERTY OF CNH INDUSTRIAL CAGE CODE: 10988 PART NUMBER AXLE.COOLER.SUPPLY2.PROTO

TEAMCENTER ITEM ID TC REV SHEET 1 OF 1 SC CLASS CRITICAL/TOTAL SC'S 99/99