


MUST CONFORM TO ALL REQUIREMENTS PER ES-B120		HOSE CLASS, PERFORMANCE AND SUPPLIER DATA	
NOM INSIDE DIA (mm)	12.5 (SAE -8)	CNH HOSE CLASS PER ES-B120	25
LENGTH (mm)	480±5	PERFORMANCE STANDARD TYPE	2
WORKING PRESSURE (MPa):	25 MPa	SAE/ISO HOSE EQUIVALENT	SAE 100R16
MIN BEND RADIUS (mm):	90	HOSE MATERIAL - APPROVED SUPPLIER 1	N/A
TEMP RANGE (°C):	-40°C TO +100°C		

LEFT END FITTING SPECIFICATION	
HEX STOCK	METRIC
SIZE	SAE -10 (1-14), O-RING SERVICE P/N,9992069
SHAPE	FEMALE ORFS SWIVEL STRAIGHT STYLE A (SHORT)

RIGHT END FITTING SPECIFICATION	
HEX STOCK	METRIC
SIZE	SAE -12 (1 3/16-12), O-RING SERVICE P/N 9991976
SHAPE	FEMALE ORFS SWIVEL STRAIGHT STYLE A (SHORT)

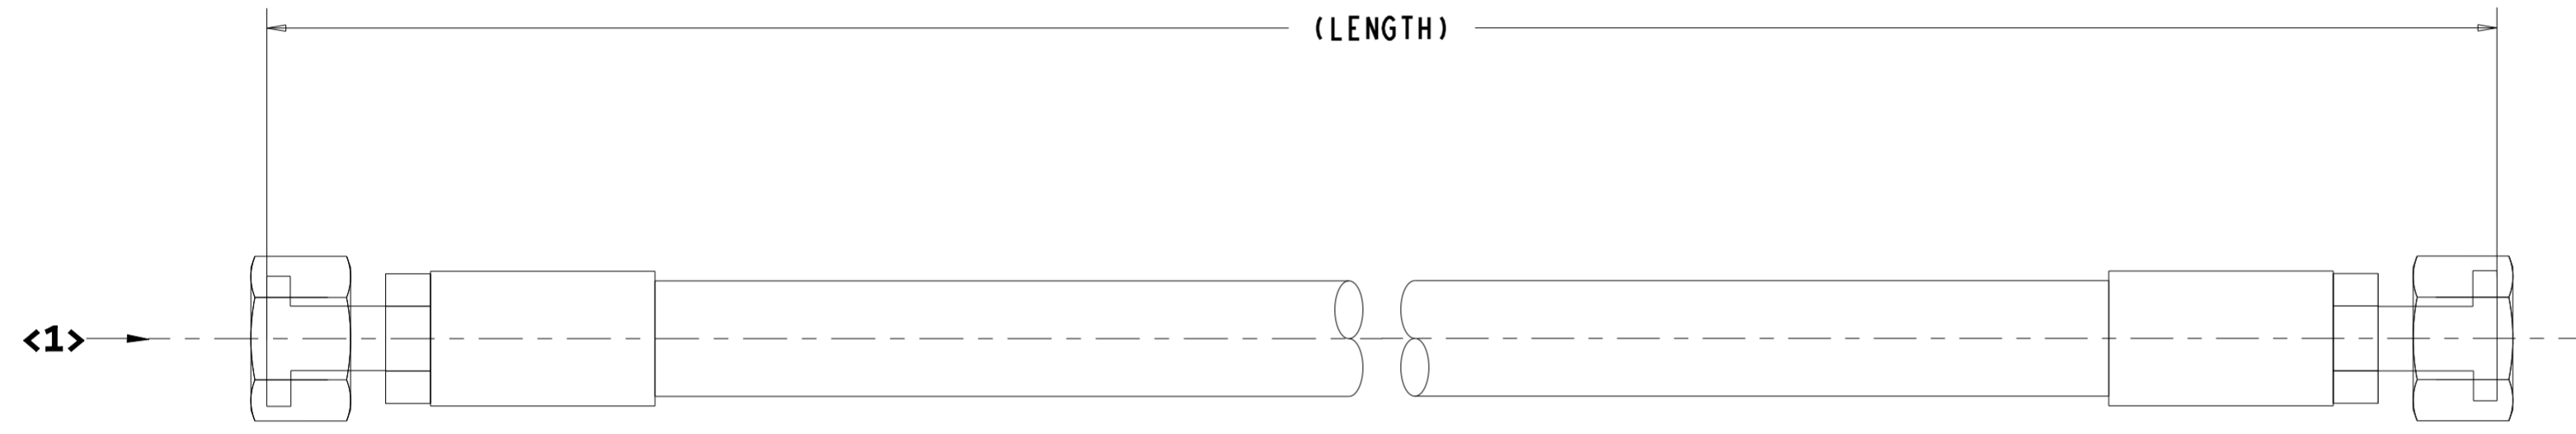

- NOTES:
- <1> ALL VIEWS ON THIS DRAWING ARE FOR REFERENCE ONLY AND MAY NOT ACCURATELY DEPICT THE HOSE ASSEMBLY.
 - 2. ALL EXPOSED SURFACES TO BE ZINC PLATED PER CNH ENS0360

CLEANLINESS MUST COMPLY WITH CNH ENS0103	CODE AD6
--	-------------

DWGB001	DRW INTERPRETATION AND SPECS
STANDARD	DESCRIPTION
APPLICABLE STANDARDS	

ECO	REV	CHANGES	BY	DATE	ECO	REV	CHANGES	BY	DATE

METRIC	THE INFORMATION HEREON IS CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF CNH INDUSTRIAL N.V. AND/OR ITS SUBSIDIARIES. ANY USE, EXCEPT THAT FOR WHICH IT MAY BE LOANED, IS PROHIBITED.			
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS, SURFACE FINISH IN MICROMETERS Ra.	DOC NO. - NOM NO	SIZE/SYS	DWG SCALE
			A2/PRO	NONE
DRAWN BY	090C123	CHECKED BY	MATERIAL BY	APPROVED BY
S BHADORIA				
LOCAL MATERIAL	NOT APPLICABLE	REFERENCE PART	NONE	
CNH MATERIAL	NOT APPLICABLE	DESCRIPTION	---	
MODEL		CAGE CODE: 10988	PART NUMBER	
TEAMCENTER ITEM ID	TC REV	SHEET	PROPERTY OF CNH INDUSTRIAL	
		1 OF 1	SC CLASS	CRITICAL/TOTAL SC'S
			---	99/99
			VALVE_TO_MOTOR	