


MUST CONFORM TO ALL REQUIREMENTS PER ES-B120		HOSE CLASS, PERFORMANCE AND SUPPLIER DATA	
NOM INSIDE DIA (mm)	25 (SAE -16)	CNH HOSE CLASS PER ES-B120	25
LENGTH (mm)	3190	PERFORMANCE STANDARD TYPE	2
		SAE/ISO HOSE EQUIVALENT	SAE 100R17
		HOSE MATERIAL - APPROVED SUPPLIER 1	GATES GLOBAL M4K MEGA 4000

Q	CLEANLINESS MUST COMPLY WITH CNH ENS0103	CODE
		AD6

LEFT END FITTING SPECIFICATION	
HEX STOCK	METRIC OR ENGLISH
SIZE	SAE -16 (1 7/16-12), O-RING SERVICE P/N 9824050
SHAPE	FEMALE ORFS SWIVEL STRAIGHT STYLE B (LONG)

RIGHT END FITTING SPECIFICATION	
HEX STOCK	METRIC OR ENGLISH
SIZE	SAE -16 (1 7/16-12), O-RING SERVICE P/N 9824050
SHAPE	FEMALE ORFS SWIVEL STRAIGHT STYLE B (LONG)

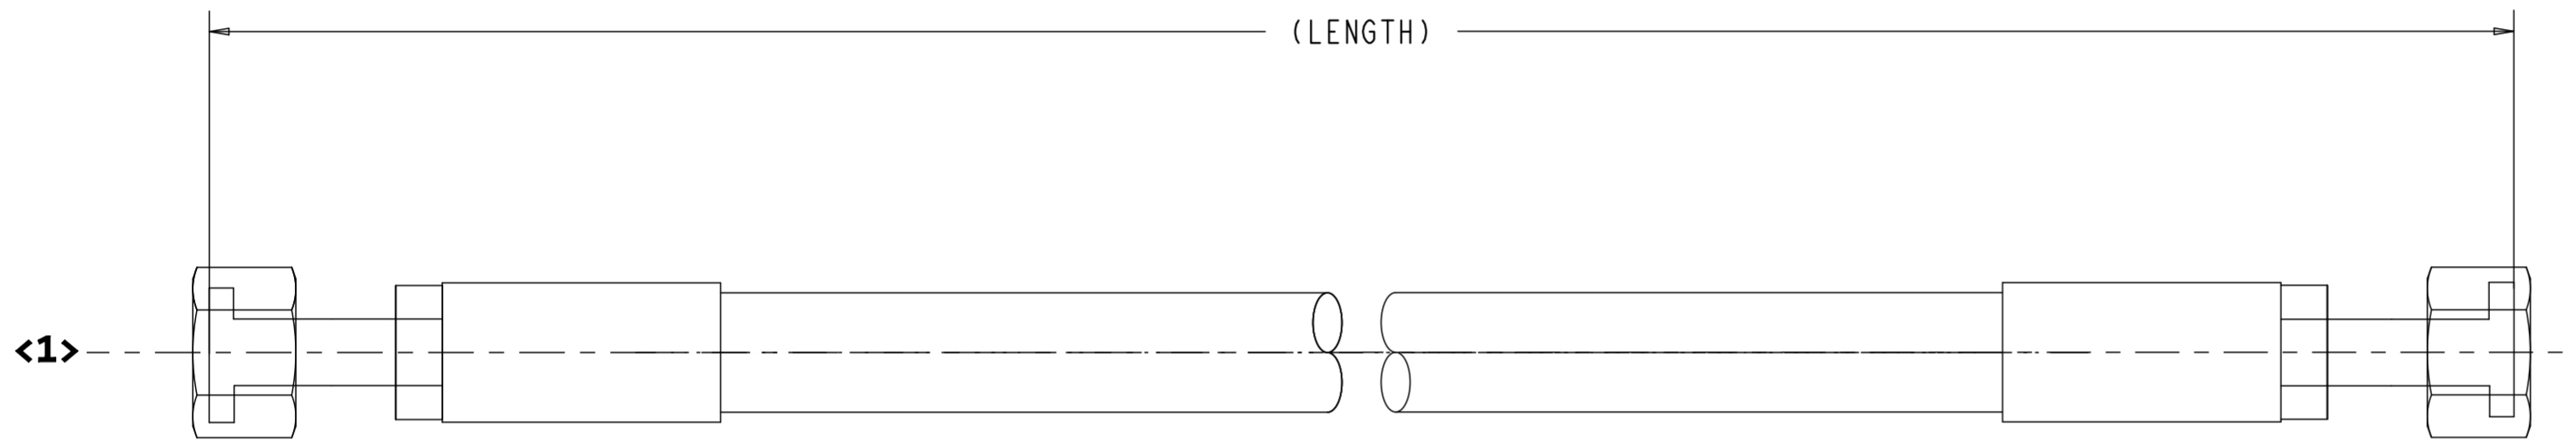

NOTES:

- <1> ALL VIEWS ON THIS DRAWING ARE FOR REFERENCE ONLY AND MAY NOT ACCURATELY DEPICT THE HOSE ASSEMBLY.
- 2. EXPOSED METAL PARTS SHALL BE ZINC PLATED PER CNH ENS0360.

Q INDICATES AN IMPORTANT CHARACTERISTIC REQUIRING COMPLIANCE WITH 86620212 (ENS0301)

86513728	STD SHOP PRACTICE GUIDE
DWGB001	DRW INTERPRETATION AND SPECS
STANDARD	DESCRIPTION
APPLICABLE STANDARDS	

ECO	REV	CHANGES	BY	DATE	ECO	REV	CHANGES	BY	DATE
					35362578	A	RELEASED DRAWING	N ALMEN	29AUG23

METRIC		THE INFORMATION HEREON IS CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF CNH INDUSTRIAL N.V. AND/OR ITS SUBSIDIARIES. ANY USE, EXCEPT THAT FOR WHICH IT MAY BE LOANED, IS PROHIBITED.			
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS, SURFACE FINISH IN MICROMETERS Ra.	DOC NO. - HOM NO	SIZE/SYS	DWG SCALE	DSGN CTRL
			A2/PRO	NONE	FA
DRAWN BY	29AUG23	CHECKED BY	MATERIAL BY	APPROVED BY	APPROXIMATE MASS
N ALMEN					35 kg
LOCAL MATERIAL	NOT APPLICABLE	REFERENCE PART	51590207		
CNH MATERIAL	NOT APPLICABLE	DESCRIPTION	HOSE ASSY, AUX/TB SUPPLY QT		
MODEL		PROPERTY OF	CAGE CODE: 10988	PART NUMBER	
TEAMCENTER ITEM ID	TC REV	SHEET	1 OF 1	92160430	
				CNHI	0/1

NOT FOR PRODUCTION